



ON-WALL OUTDOOR HI-FI LOUDSPEAKER

The GARDIAN OW 6 is the first DALI loudspeaker designed for all weather, all-year-round, outdoor use. Water and dust proof construction, combined with genuine DALI low-loss sound quality, and multiple features designed to ensure simple installation make the GARDIAN OW 6 the definitive best-in-class choice.



SCAN QR CODE FOR
MORE INFORMATION

WATERPROOF AND DUST-PROOF TO IP67

SIMPLE CLICK N' CONNECT BRACKET

-20°C TO +70°C TEMPERATURE RANGE

LANDSCAPE OR PORTRAIT MOUNTING
WITH PAN OR TILT

EASY CONNECTION WITH HIDDEN CABLES

GENUINE DALI SOUND - OUTDOORS

[DALI-SPEAKERS.COM](https://www.dali-speakers.com)

DALI GARDIAN
OW 6

DALI



DANISH AUDIOPHILE
LOUDSPEAKER INDUSTRIES

[DALI-SPEAKERS.COM](https://www.dali-speakers.com)

IP67 PROTECTION

The GARDIAN OW 6's IP67 certification provides effective protection against dust and water in all weather conditions, even in exposed locations.

SIMPLE CLICK-FIT BRACKET


Installing a loudspeaker outdoors can be a challenge. But, with our Click 'n' Connect mounting bracket solution, installing the GARDIAN OW 6 is quick and simple, even in the most tricky locations and conditions.

-20°C TO +70°C TEMPERATURE RANGE

Large variations in ambient temperature are a challenge for any outdoor loudspeaker. But with an operating range of -20°C to +70°C, the GARDIAN OW 6 keeps making music, whatever the weather.

LANDSCAPE OR PORTRAIT

Flexible pan-and-tilt adjustment in landscape or portrait orientation delivers outstanding wide dispersion sound in any installation.

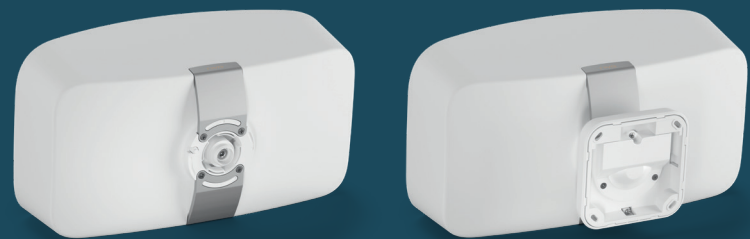

Back view: with and without click-fit mounting bracket.



DALI GARDIAN OW 6 SPECIFICATIONS

Frequency range	47 - 25,000 Hz +/- 3dB
Sensitivity	84 dB @ 1 m for 2.83 V
Nominal impedance	6 Ohm
Maximum SPL	103 dB
Crossover frequency	2,700 Hz
Crossover principle	2-way
Recommended amplifier power	50 - 200 Watt
High frequency driver(s)	1 x 25 mm soft dome (Co-axially mounted)
High frequency diaphragm	Soft woven fabric
Low/Mid frequency driver(s)	1 x 5 inch
Low/Mid frequency diaphragm	Polypropylene
Connection input(s)	Single wire
Enclosure type	Tuned Mass Enclosure, 2 x 5 inch (oval) passive radiators
Other features	Click n' Connect wall bracket
Installation location	On-Wall / On-Ceiling
Recommended placement	Ceiling / Front / Centre / Surround
IP rating	IP 67
Outer dimensions incl. grille (H x W x D)	200 x 372 x 206 mm 7.87 x 14.65 x 8.11 inches
Weight incl.grille	4.08 kg 9 lbs
Shipping weight (pair)	10.4 kg 22.92 lbs
Finish	White / Black
Included accessories	Wall Mounting Template
Optional accessories	Wall Bracket Cover

All technical specifications are subject to change without notice.